

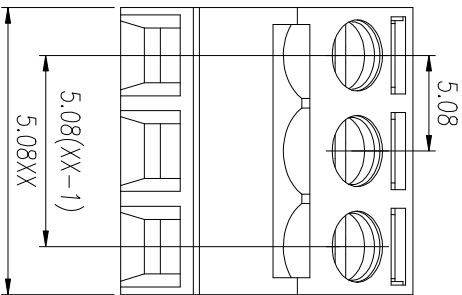


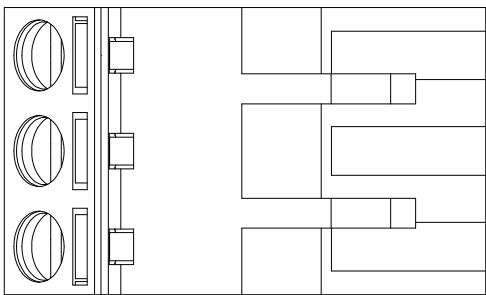

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE

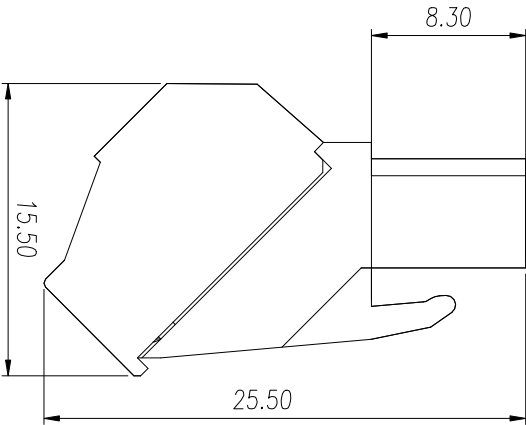

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	6 to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UL/CUL 技术参数		cULus			
UL/CUL Technical Data	Use Group	B	C	D	
等级	Rated Voltage [V]	300	-	300	
额定电压	Rated Current [A]	15	-	10	
额定电流	Wire Range Solid/Stranded [AWG]	28-12			
接线范围	单/多芯线				
耐压	Withstanding Voltage	1600V/1min			
IEC 技术参数	IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage [V]	250	320	630	
额定电流	Rated Current [A]	12	12	12	
额定冲击电压	Impulse withstand voltage [kV]	4.0	4.0	4.0	
导线截面积	Conductor cross section 硬质/柔性导线 Solid/flexible	0.2-1.5 [mm ²]			
材料	Material				
绝缘材料	Insulation Material	PA66			
阻燃等级	Inflammability	UL94V-0			
导体材料	Contact Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀镍 Ni Plated			
一般参数	Other Data				
间距 Pitch / 极数 Poles	[mm] / [P]	5.08 / 02-24			
剥线长度 Stripping Length	[mm]	7-8			
螺丝 Screw/扭矩 Torque(Max)	[N.m]	M3.0/5			
工作温度 Operating temperature	[°C]	-40~105			
焊接温度 Soldering temperature		-			
引脚/尺寸 Pin Dimensions	[mm]	-			
PCB孔径 PCB Hole Diameter	[mm]	-			

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:2
名称 / TITLE	WJ2EDGKL-5.08-XP-1YY-00A				
第二视图/THIRD ANGLE PROJECTION					版本 / REV
					V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD